




**NEW
MODEL FOR 2016**

BEETLE™ BT12, BT18, BT25


FOR CLEANING SMALL, CURVED TUBES, PIPES AND DRAINS

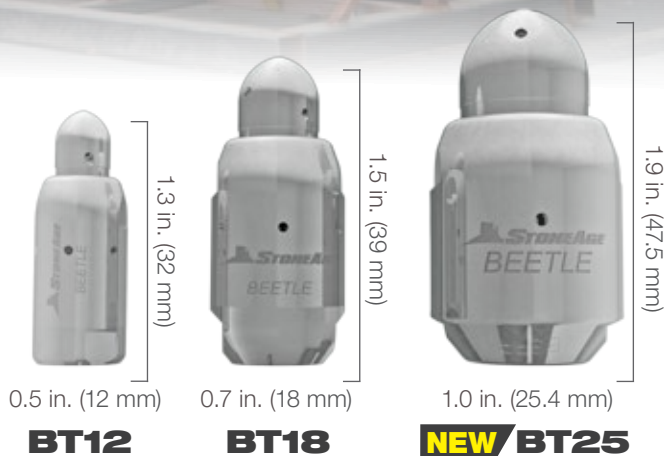

SPECIFICATIONS:

	BT12	BT18	BT25
TUBE ID RANGE	0.6–1.0 in. 15–25 mm	0.9–1.3 in. 22–33 mm	1.2–3.0 in. 30–76 mm
PRESSURE RANGE	10–22k psi 700–1500 bar	10–22k psi 700–1500 bar	8–22k psi 550–1500 bar
FLOW RANGE	6.5–8.5 gpm 25–32 l/min	8.5–11 gpm 32–42 l/min	8–20 gpm 30–76 l/min
INLET CONNECTIONS	P1, M7, MP4L, MP4R	P1, P2, BSPP2, MP6L, MP6R, MP4L, MP4R	1/8 NPT, 1/4 NPT, 1/4 BSPP, 3/8-28 LH/RH, 9/16-18 LH/RH
DIAMETER	0.5 in. 12 mm	0.7 in. 18 mm	1.0 in. 26 mm
LENGTH	1.3 in. 32 mm	1.5 in. 39 mm	1.9 in. 48 mm

NEW BEETLE BT25
 Designed specifically for for cleaning curved tubes/pipes from 1 1/4 – 4 in. (32 – 102 mm).

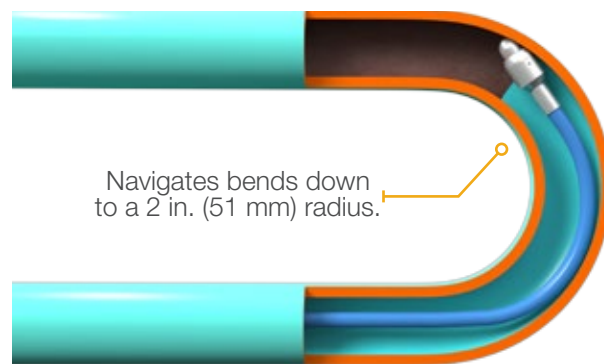

STONEAGE
 ENGINEERING THE POWER OF WATER
 1-866-795-1586 • WWW.STONEAGETOOLS.COM