



# Sentinel Mobile App Guide

## Table of Contents

<b>Sentinel Mobile App Guide</b> .....	<b>2</b>
<b>Installation</b> .....	<b>2</b>
<b>User Signup – Invitation</b> .....	<b>3</b>
<b>Firmware Upgrade</b> .....	<b>4</b>
<b>Log Upload</b> .....	<b>5</b>
<b>Send Bundle Profile to Controller</b> .....	Error! Bookmark not defined.


## Sentinel Mobile App Guide

### Installation

#### Prerequisites

- An iOS Device with Running IOS 9.0 or later
  - An Apple ID (to use the App Store)
1. On an iOS Device, to go the App Store and search for 'stoneage sentinel'
  2. Tap the Install button to install the application on the device.
  3. Open the Application

To use the application you must sign in. If you do not have a clean connect account, you need to be invited by a manager or admin of your organization, or a member of StoneAge Organization.

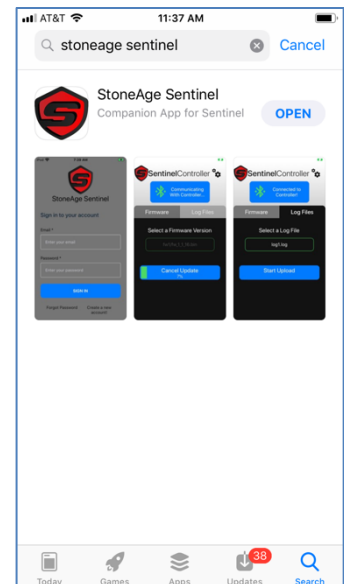


## User Signup – Invitation

A Company Administrator or StoneAge employee will invite you will have received an email with a temporary password:

1. Sign In with the provided email and password
2. A 'Change Password' prompt will appear, enter your new password and to confirm it. Once entered press 'Set Password & Login'
3. After successful submission a new password you will be logged in.

**\*\* NOTE: You may also do this sign up process via the web applications at [cleanconnect.com](http://cleanconnect.com) \*\*\***

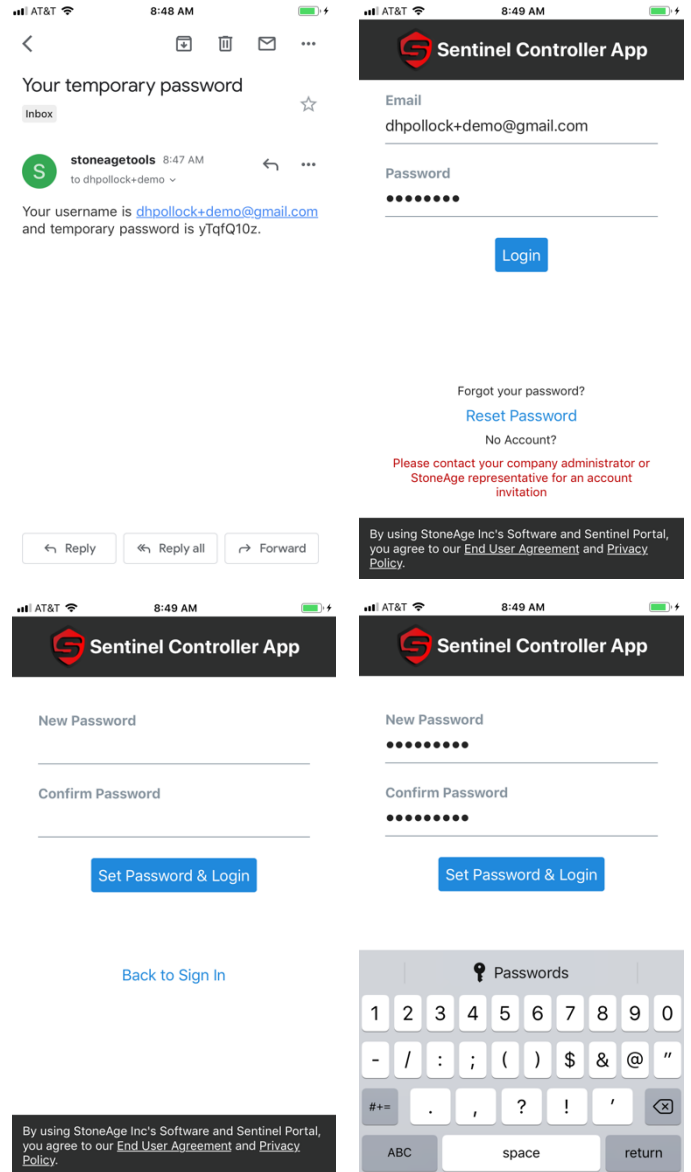

## Firmware Upgrade

To upgrade firmware:


1. Turn on the Sentinel Controller.
2. On the Sentinel Controller, navigate to: Connect -> Wireless
3. The controller will buzz and ask `Enable Wireless`. Select OK

Now the controller should state: `Status: Discoverable`

4. On the iOS App, tap the blue `Connect to Controller` button


If successful, button will change to `Connected to Controller!`

5. In the `Firmware` tab, tap the `Select an Item` box to bring up a list of available firmware.
6. Select a firmware. If you are unsure which firmware is the best, select the firmware with the `<Latest>` tag.
7. Once selected, tap the `Start Update` button. A progress bar will appear
8. Once the firmware update is complete, the controller will restart and then it will be available for use with the new firmware.

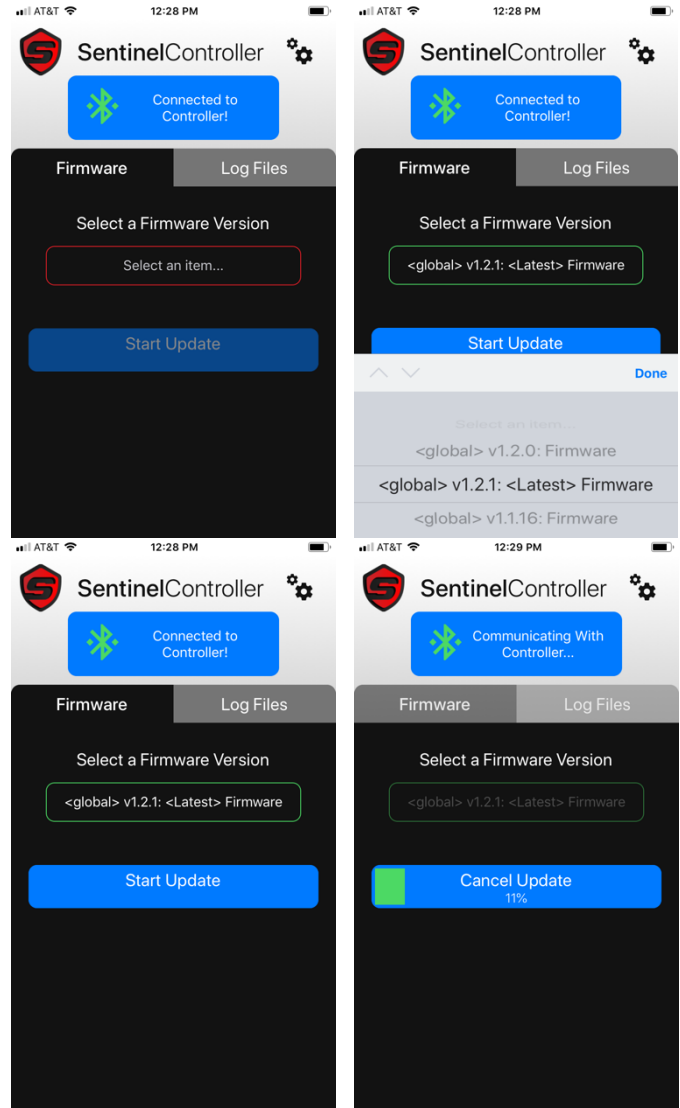

## Log Upload

1. To begin, connect the controller to the ios device as shown in the Firmware Upgrade section.

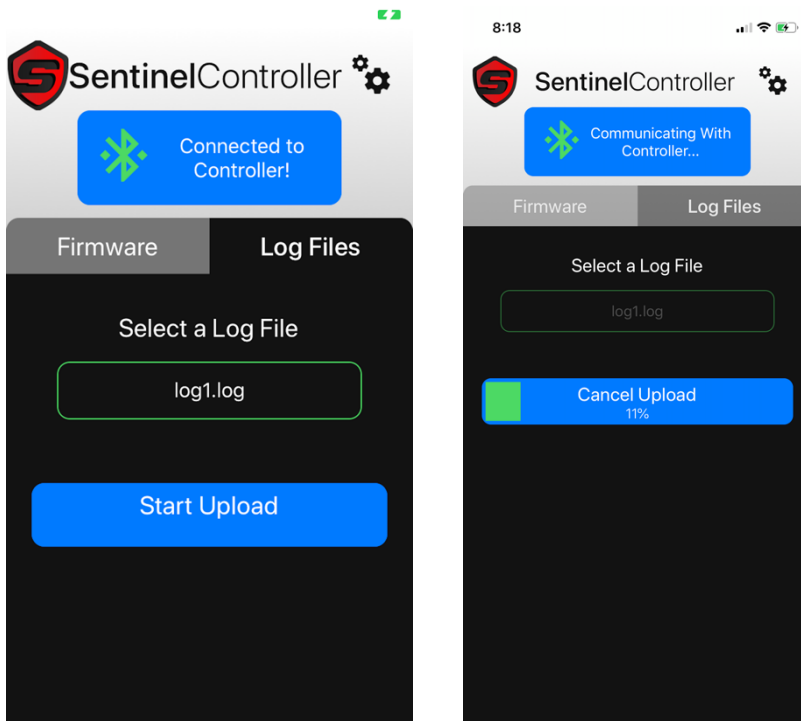

2. Tap on the 'Log Files' tab
3. Select a log file from the drop down.
4. Tap 'Start Upload'. A progress bar will appear. When the log successfully uploads, it will be removed from the controller. You may now view the visualized Job Log on Sentinel Link!